


The SmartKey Vise

by Genesis Resource
for Morse Watchmans

taking today's
keys into
tomorrow

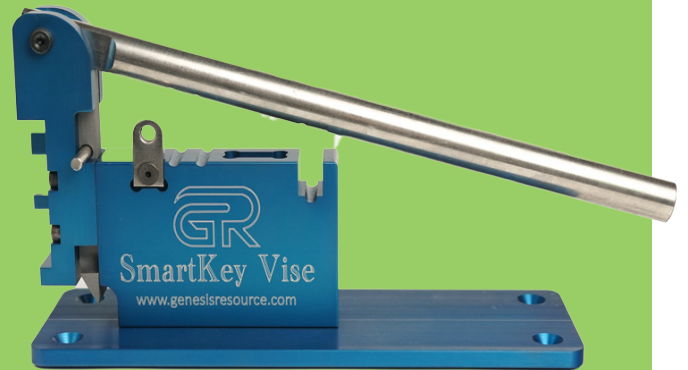


SmartKey Vise is designed with non-skid rubber pads for standard usage and built-in mounting holes to optionally secure to work surfaces.

- Attaches SmartKey u-rings
- Secures SmartKeys with a vise-like grip to cut the u-ring off (cutting tool not included)
- Presses the cut off u-ring segment into the SmartKey chamber
- Splits tamper-proof KeyRing hubs
- Spreads tamper-proof KeyRings for easier hub attachment
- Seals tamper-proof KeyRing hubs


The SmartKey Vise is a 6-in-1 Tool



Seals SmartKeys

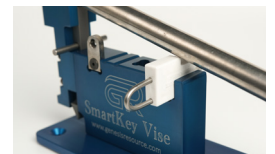


Secures SmartKeys

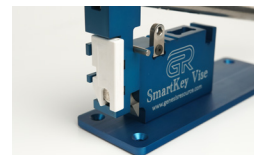

Presses U-Rings



Splits Hubs

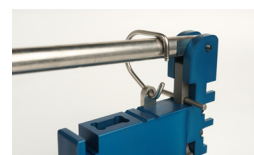

Spreads Rings




Seals Hubs


The KeyWatcher SmartKey Vise 6-in-1 Tool

by Genesis Resource, Inc. for Morse Watchmans SmartKeys, KeyRings, and Hubs


Instructions Guide

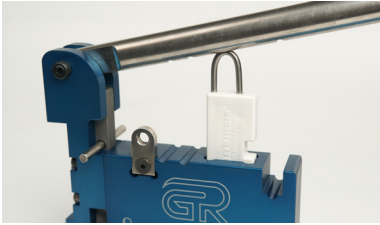

How to Seal a SmartKey U-Ring: Place the SmartKey in the top chamber towards the center of the vise. Place the new u-ring in line with the holes in the top of the SmartKey. Make sure that the notched end of the u-ring is inserted in the hole on the same side as the notched side of the SmartKey. Bring the lever downwards to push the u-ring in.

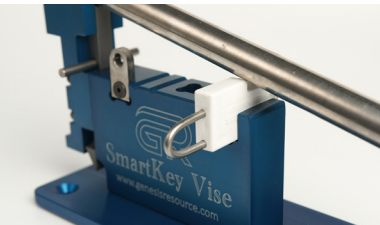


How to Secure a SmartKey and Cut Off the U-Ring: Place the SmartKey with the notched side facing up in the slot and in line with the lever handle. (u-ring can be on the left or right). Apply pressure on the lever handle to keep the SmartKey from moving. Use a small hacksaw or Dremel to cut the top side of the stainless steel u-ring flush with the edge of the SmartKey.

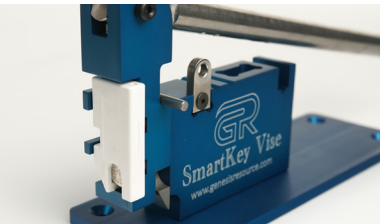

How to Remove SmartKey U-Ring Fragments: After cutting the u-ring from the SmartKey, remove the u-ring fragments left inside the SmartKey. To do this, place the SmartKey at the back of the SmartKey Vise with the notch facing left as pictured. Align the hole on the SmartKey with the pin on the vise and slowly raise the lever. This will press the u-ring fragments into the SmartKey chamber. Add another u-ring by performing **How to Seal a SmartKey** above.



How to Split and Remove KeyRing Hubs: The SmartKey Vise is the perfect tool for safely and efficiently cutting and removing the colored hubs from Morse Watchmans tamper-proof KeyRings. Simply raise the lever handle to enable the hub to be located under the cutter at the back of the vise. Press the lever handle down firmly to cut the hub in two. Lift the handle to remove the ring and hub pieces.

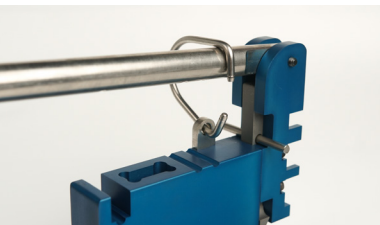

How to Spread Open KeyRings: Make sure the hub is completely removed with the hub cutter. Slide tamper-proof KeyRing over the handle with the opening facing as shown in the picture. Then hook the lower end into the eyelet that protrudes up from the vise base. Place one hand on the front base plate of the vise while pulling up on the handle, spreading the ring to the desired opening width.



How to Add a Hub to the KeyRing and Seal: Attach a hub to one side of the KeyRing by pressing it on by hand. Add the keys and SmartKey to the ring. Place the ring with the hub at the bottom in the appropriate groove on the top of the vise (small rings towards the back and larger ones to the front). Align with the corresponding groove under the handle. Press the lever handle down to lock the other side of the ring into the hub until you hear a click. Remove the newly sealed ring from the vise and rotate the hub one full revolution to be sure it is locked.